


DS-2CE16C2T-IT1/IT3 /IT5

HD720P EXIR Bullet Camera

TURBO HD




EXIR

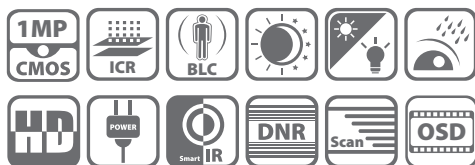

Key features

- 1.3 Megapixel high-performance CMOS
- Analog HD output, up to 720P resolution
- True Day/Night
- DNR, Smart IR
- EXIR technology, up to 20/40/80m IR distance
- IP66 weatherproof

Dimensions

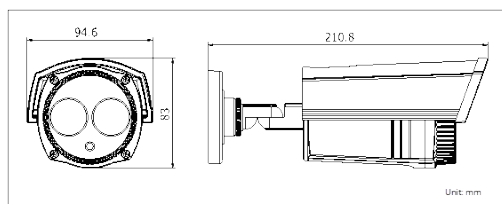

Accessories



Video balun
DS-1H18

Available models

- DS-2CE16C2T-IT1
- DS-2CE16C2T-IT3
- DS-2CE16C2T-IT5

	DS-2CE16C2T-IT1	DS-2CE16C2T-IT3	DS-2CE16C2T-IT5
Camera			
Image Sensor	1 MP CMOS Image Sensor		
Effective Pixels	1280(H)*720(V)		
Min. Illumination	0.01 Lux @(F1.2,AGC ON), 0 Lux with IR		
Shutter Time	1/25(1/30) s to 1/50,000 s		
Lens	3.6mm (2.8mm, 6mm, 8mm optional)	3.6mm (2.8mm, 6mm, 8mm, 12mm, 16mm optional)	
	Angle of View: 78°(3.6mm), 97.3°(2.8mm), 51.2°(6mm), 36°(8mm)	Angle of View: 78°(3.6mm), 97.3°(2.8mm), 51.2°(6mm), 36°(8mm), 23°(12mm), 17.9°(16mm)	
Lens Mount	M12		
Day & Night	ICR		
Synchronization	Internal synchronization		
Video Frame Rate	720p@25fps/720p@30fps		
HD Video Output	1 Analog HD output		
CVBS Output	1Vp-p Composite Output(75Ω/BNC)		
S/N Ratio	More than 52dB		
General			
Working Temperature/ Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)		
Power Supply	12 VDC		
Power Consumption	Max. 3W	Max. 4W	
Weather Proof Ratings	IP66		
IR Range	Up to 20m	Up to 40m	Up to 80m
Dimensions	94.6×83×210.8mm(3.72"×3.27"×8.30")		105×104.8×263.1mm(4.13"×4.13"×10.36")
Weight	700 g (1.54 lbs)		800 g (1.76 lbs)